

# HIGH DEFINITION DIGITAL SET TOP BOX WITH RECORD FUNCTION

*SRT 5425*



- Receives all Free to Air Digital Channels, HD & SD.
- Record Function via USB 2.0 Hard Drive (sold seperately)
- Record 1 program while watching another (from same network)
- Record and Playback, Time Shift, pause and rewind live TV
- USB 2.0 Host for Multimedia file playback, MP3, JPEG and software update (supports MKV, TS, VOB, AVI, DivX and more)
- Electronic Program Guide with one touch record
- Easy Menus with auto channel search
- Closed Captions (record and playback)
- MPEG-4 compatible for record and playback 3D TV broadcast

# Record and Playback function via External USB Hard Drive (sold seperately) requires Hard Drive in Fat32 Format.



[www.strong.com.au](http://www.strong.com.au)



# SRT 5425 SPECIFICATIONS



## TUNER

Guard Internal Modes	: 1/32, 1/16, 1/8, 1/4 Active Symbol Duration	Signal Level	: -78.5 - -25dBm
FEC Mode Rates	: 1/2, 2/3, 3/4, 5/6, 7/8	Input Impedance	: 75 ohm
Input Connector	: IEC 169-2, Female	Wave Form	: OFDM
Frequency Range	: 174-230MHz, 474-868MHz	Carrier Mode	: 2K & 8K
Demodulator	: COFDM 2K/8K-Carrier		
Channel Bandwidth	: 7/8MHz Switchable by Software		

## MPEG TS A/V Decoder

Transport Stream	: MPEG-2 ISO/IEC 13818-1	Audio Decoding	: MPEG/Musical Layer & Dolby Digital
Profile Level	: MPEG-II MP@ML, MPEG-II MP@HL	Audio Mode	: Stereo / Joint Stereo / Mono
	: MPEG-IV AVC/H.264 HP@L4.0	Sampling Rate	: 32KHz, 44.1KHz & 48KHz
Video Resolution	: 720 x 576i/p, 1280 x 720p & 1920 x 1080i	Input Rate	: Max. 15 Mbit/s
Video Formats	: 4:3 Letterbox, 4:3 Pan & Scan, 16:9 Pillarbox & 16:9 Full Screen		

## A/V Input/Output

Video Output	: CVBS, Audio Output L & R (RCA x 3)	Video Output	: Component Output, Y, Pb, Pr (RCA x 3)
Digital A/V Output	: HDMI 1.2 (High Definition Multimedia Interface)	Audio L/R	: RCA/Cinch (RCA x 2)
S/PDIF	: Digital Audio Output (RCA x 1)		

## Data Input/Output

USB : 2.0 Host

## System Resources

Main Processor	: MSD7828L-LF (216MHz)	DDR DRAM	: 1024Mbit
Flash ROM	: 32Mbit		

## Power Supply


Input Voltage	: AC 100-240V~, 50/60Hz	Power Consumption	: Max. 20W MEPS compliant
Type	: SMPS (Switching Mode Power Supply)		: Less than 1W on Stand-By Mode
		Protection	: Separate Internal Fuse

## Physical Specifications

Size (W x D x H)	: 250 x 182 x 45mm (192mm to end of connectors)
Weight	: 1.1 Kg
Operating Temperature	: 0°C ~ +50°C
Storage Temperature	: -40°C ~ +70°C

E. & O. E.

DISTRIBUTED BY:

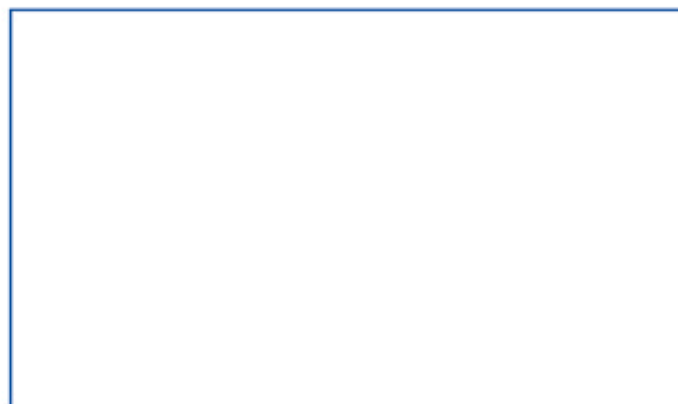

STRONG AUSTRALIA PTY LTD. - 60 WEDGEWOOD ROAD, HALLAM, VICTORIA 3803, AUSTRALIA  
PH: +61 3 8795-7990 FAX: +61 3 8795-7991

TECHNICAL SUPPORT: 1 800 820 030

[www.strong.com.au](http://www.strong.com.au)

[sales@strong.com.au](mailto:sales@strong.com.au)