


Quick Start Guide.




Connecting the TV antenna to the SRT 5409

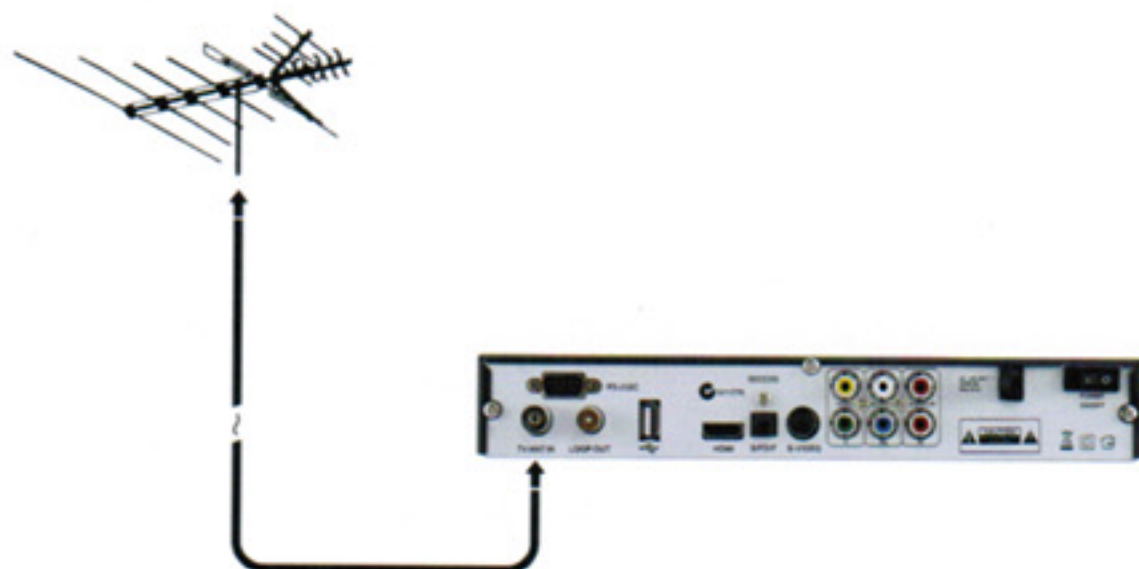


Choose one of the following connection methods

Connecting via composite (yellow, white and red cables)

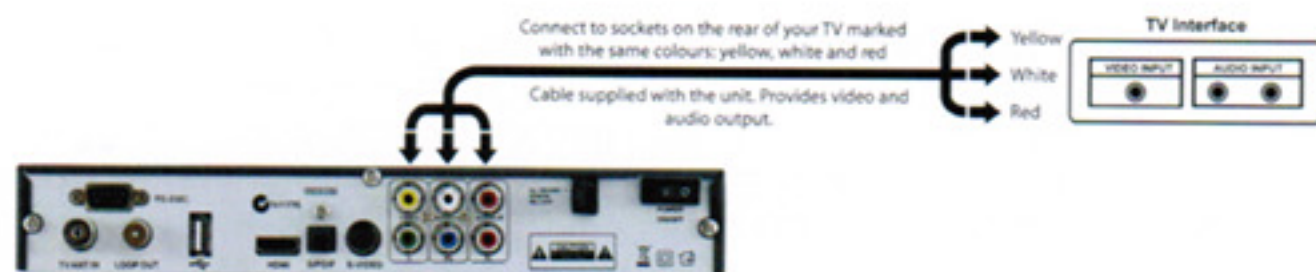


1. Plug in the power cord to the mains and switch the **SRT 5409** ON at the rear panel.
2. Select the correct input on your TV (AV, Input key on TV remote).
3. You will receive the Strong Technologies logo on screen with a message 'do you want to Auto Search'. Press 'OK' to begin the Auto Search.
4. The **SRT 5409** will now search for all available channels in your area and once complete automatically begin to display one of these channels. To change the size of the picture to suit the TV, press the 'Aspect' button on the **SRT 5409** remote.

Connecting via Component (green, blue, red cables) and audio (white and red cables)

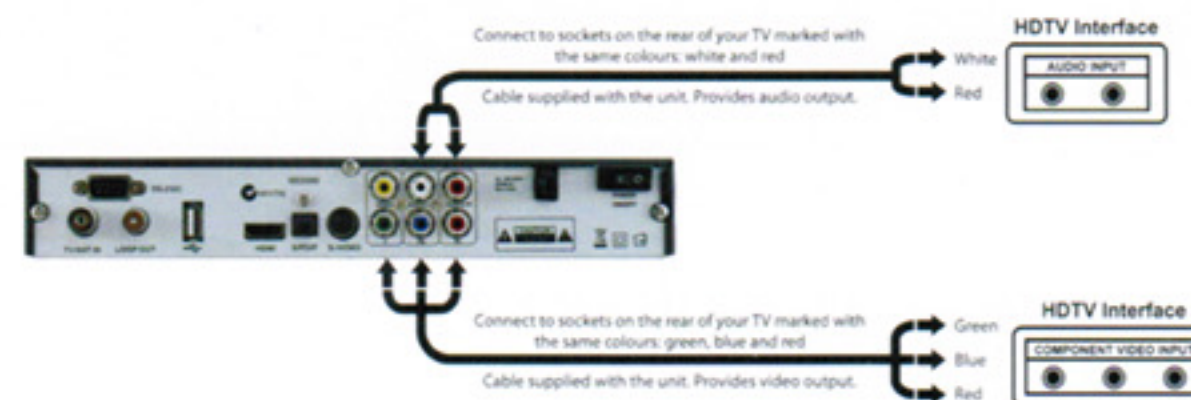

1. Plug in the power cord to the mains and switch the **SRT 5409** ON at the rear panel.
2. Select the correct input on your TV (AV, Input key on TV remote).
3. You will receive the Strong Technologies logo on screen with a message 'do you want to Auto Search'. Press 'OK' to begin the Auto Search.
4. The **SRT 5409** will now search for all available channels in your area and once complete automatically begin to display one of these channels. To change the size of the picture to suit the TV, press the 'Aspect' button on the **SRT 5409** remote.

Connecting via HDMI

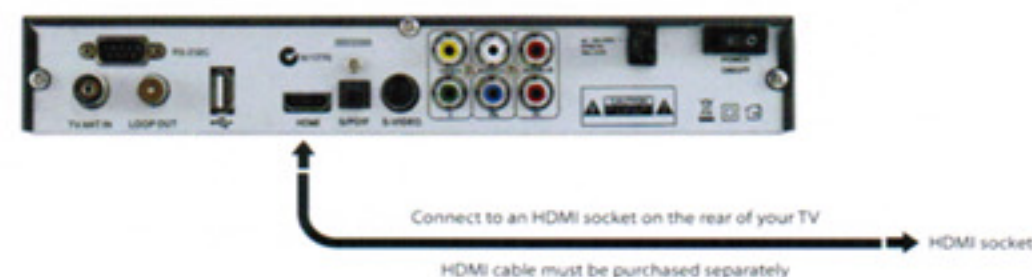

1. Plug the power cord to the mains and switch the **SRT 5409** ON at the rear panel.
2. Select the correct input on your TV (AV, Input key on TV remote).
3. Using the **SRT 5409** remote press the 'exit' button. The front panel display will now show 0000. Now press the 'format' button on the remote twice in rapid succession until 1080 briefly flashes up on the front panel. If this is unsuccessful, repeat this process until 1080 flashes on the front panel.
4. A message 'no service' will now be displayed on your TV screen (If you do not see this message, please check that your TV is on the correct AV Input channel). Using the **SRT 5409** remote press 'menu', scroll down to 'Install' and press 'OK', type in the default PIN number 0000 using the number pad on the remote, press 'OK' on 'Auto Search'.
5. The **SRT 5409** will now search for all available channels in your area and once complete automatically begin to display one of these channels. To change the size of the picture to suit the TV, press the 'Aspect' button on the **SRT 5409** remote.